

**STRUCTURE**

|          |                           |              |
|----------|---------------------------|--------------|
| <b>1</b> | Top /spindle surface      |              |
|          | Thickness                 | 1.70 mm      |
|          | Material                  | NBR          |
|          | Colour                    | Green 83     |
| <b>2</b> | Inner sheet               |              |
|          | Material                  | Polyamide mm |
| <b>3</b> | Drive surface             |              |
|          | Thickness                 | 1.70 mm      |
|          | Material                  | NBR          |
|          | Colour                    | Green 83     |
|          | Weight                    | 4.70 Kg/m2.  |
|          | Thickness                 | 3.90 mm      |
|          | Max. fabrication width    | 500 mm.      |
|          | Electrostatics properties | Antistatic   |

**TENSIONS**

|                       |             |
|-----------------------|-------------|
| Shaft load at 1% **   | 10.00 N/mm  |
| Tensile Strength      | 225.00 N/mm |
| Elongation at break % | 22          |

**MIN. DRUM DIAMETER**

|             |       |
|-------------|-------|
| Flexing [F] | 30 mm |
|-------------|-------|


**TEMPERATURE**

|                          |             |
|--------------------------|-------------|
| Steady Temp. [min - max] | -20 / 80 °C |
|--------------------------|-------------|


**APPLICATION**

Folder and carrier belt

**STRUCTURE**

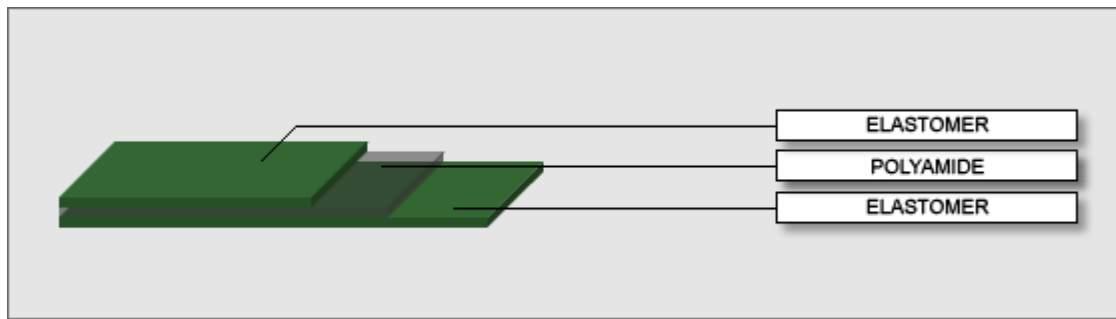

**PARAMETERS**

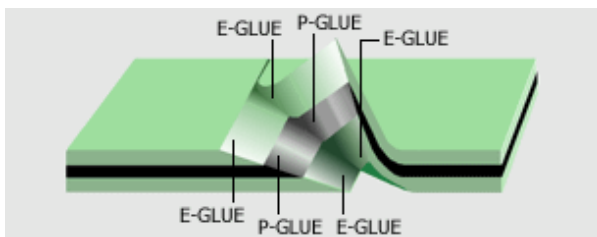

|            |        |
|------------|--------|
| Splice     | BS     |
| Temp. °C   | 120    |
| Time (min) | 30     |
| Glue cover | E-Glue |
| Glue int.  | P-Glue |
| Sheet      | 102    |



Time starts when the press has reached the stated temperature.  
Take the belt out when the splice has been done and the press has cooled down to approx. 30-40 °C.