

**STRUCTURE**

<b>1</b>	Top /spindle surface	
	Thickness	0.50 mm
	Material	NBR
	Colour	Green 83
<b>2</b>	Inner sheet	
	Material	Polyamide mm
<b>3</b>	Drive surface	
	Thickness	0.35 mm
	Material	Nylon fabric
	Colour	Black 80
	Weight	1.30 Kg/m2.
	Thickness	1.25 mm
	Max. fabrication width	500 mm.
	Electrostatics properties	Antistatic

**TENSIONS**

Shaft load at 1% **	6.00 N/mm
Tensile Strength	135.00 N/mm
Elongation at break %	22

**MIN. DRUM DIAMETER**

Flexing [F]	20 mm
-------------	-------


**TEMPERATURE**

Steady Temp. [min - max]	-20 / 80 °C
--------------------------	-------------


**APPLICATION**

- Drive belt
- Graphic belts

**STRUCTURE**

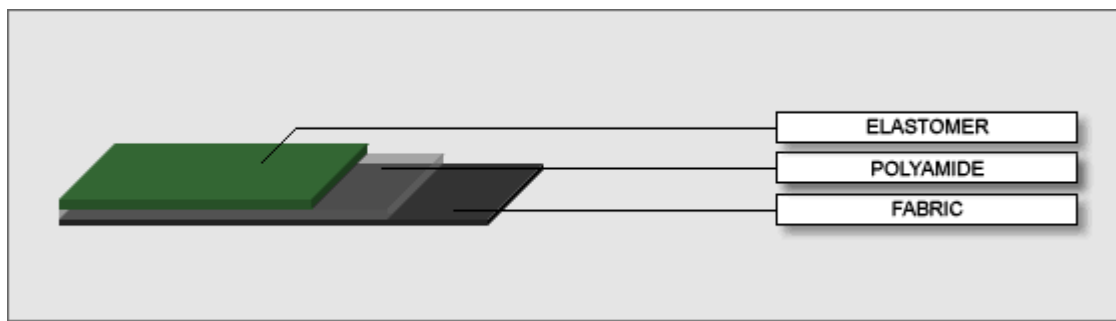

**PARAMETERS**

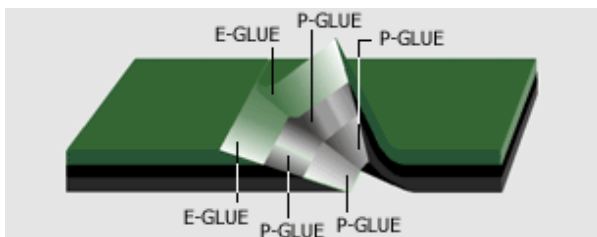

Splice	BS
Temp. °C	120
Time (min)	15
Glue cover	E-Glue
Glue int.	P-Glue
Sheet	102



Time starts when the press has reached the stated temperature.  
Take the belt out when the splice has been done and the press has cooled down to approx. 30-40 °C.