

STRUCTURE

1	Top /spindle surface	
	Thickness	2.00 mm
	Material	Leather
	Colour	Grey 80
2	Inner sheet	
	Material	Polyamide mm
3	Drive surface	
	Thickness	2.00 mm
	Material	Leather
	Colour	Grey 80
	Weight	4.10 Kg/m2.
	Thickness	4.50 mm
	Max. fabrication width	500 mm.
	Electrostatics properties	Antistatic

TENSIONS

Shaft load at 1% **	10.00 N/mm
Tensile Strength	225.00 N/mm
Elongation at break %	22

MIN. DRUM DIAMETER

Flexing [F]	40 mm
-------------	-------


TEMPERATURE

Steady Temp. [min - max]	-20 / 80 °C
--------------------------	-------------


APPLICATION

Drive belt

STRUCTURE

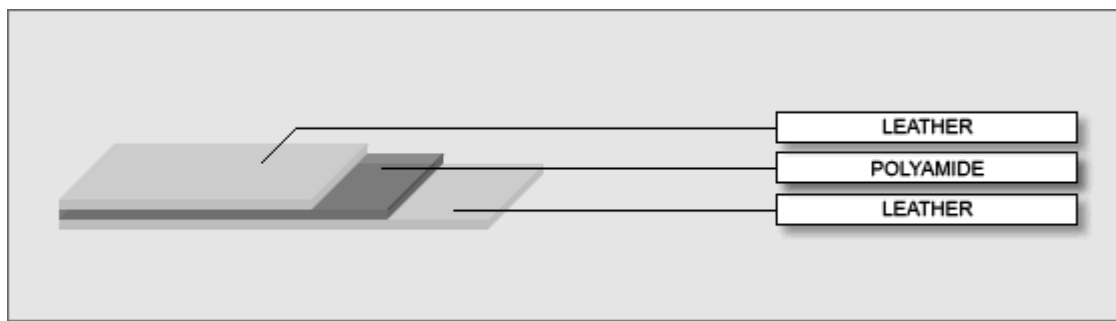

PARAMETERS

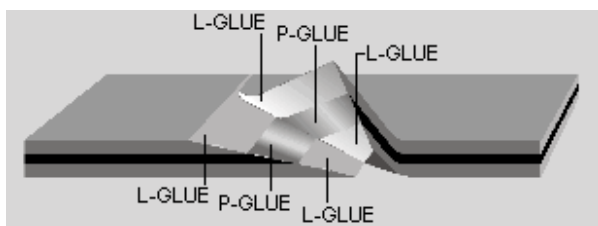

Splice	BS
Temp. °C	120
Time (min)	15
Glue cover	L-Glue
Glue int.	P-Glue
Sheet	101



Time starts when the press has reached the stated temperature.

Take the belt out when the splice has been done and the press has cooled down to approx. 30-40 °C.